




REV	MODIFICATION	UPDATE DATE	SIGNATURE

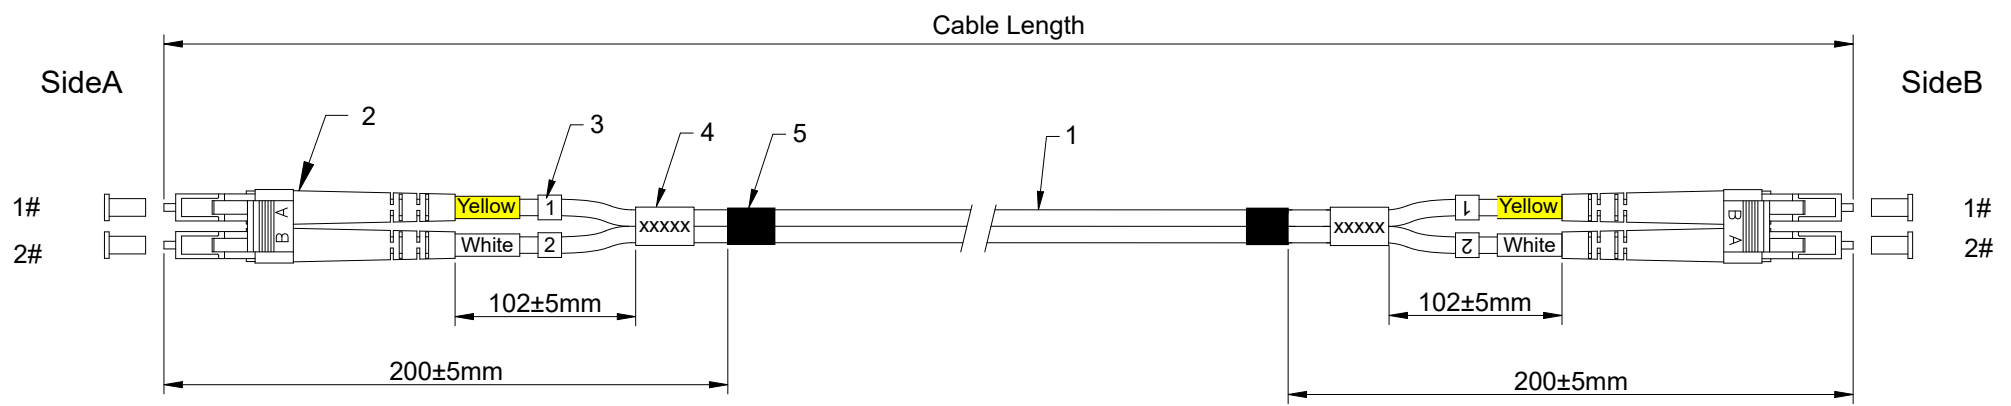

Notes:
 1. Width: 25mm, Length: 30mm.
 2. P/N: LYNN Part Number
 3. Bar Code: Code 128 Auto
 Print: xxxxyyyzzzzzz
 4. S/N: xxxxyyyzzzzzz, e.g. A083930000001.
 X: manufacture location.
 yyyyyy: Internal work order code.
 zzzzzz: Incrementing serial code.

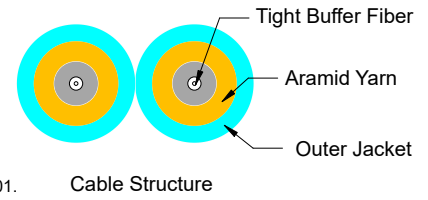

NOTES:
 1. Insertion loss ≤ 0.2dB
 2. Return loss ≥ 35dB

Cable Length	Tolerance
Cable Length < 1M	5cm
1M ≤ Cable Length < 15M	10cm
15M ≤ Cable Length < 30M	15cm
Cable Length ≥ 30M	Cable Length * 1%

5	2	Black Shrinkage Tube
4	2	Cable Label
3	4	Cable Marker
2	2	LC/UPC MM 2.0mm Duplex Connector(Beige Housing White Boot)
1	A/R	OD: 2.0mm, Multimode 50/125 OM3-300, Corning Fiber, Fiber Optic Cable, Duplex, OFNR, Color: Aqua
ITEM	QTY	P/N
SPECIFICATION		

Requirements Of Cable					
Cable Type				Fiber Type	OM3-300 Corning
Cable Diameter	2.0mm		Attenuation	@850nm ≤ 3.5dB/km	
Cable Material	OFNR			@1300nm ≤ 1.5dB/km	
Tensile Strength	Long Term	70 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	150 N		Short Term	500 N/100mm
Bending Radius	Static	10 D	Temperature Range	Storage Temperature	-20°C ~ +70°C
	Dynamic	20D		Operating Temperature	-10°C ~ +60°C

LYNN	DRAW	C. Brandenburg	DATE	22-07-2024	TITLE: Fiber Optic patch Cord LC/UPC-LC/UPC Duplex Multimode				
	CHECK		APPROVED		CUSTOMER NO		DWG NO		REV