




Powering Business Worldwide

## Eaton Internal Replacement Battery Cartridge (RBC) for 5P1500, 5P1550G UPS Systems

MODEL NUMBER: 744-A2223

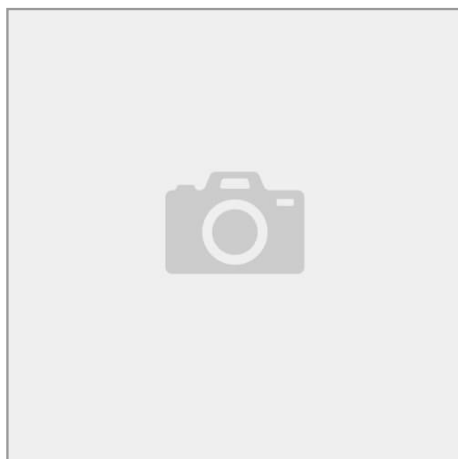

UPS backup battery cartridge replaces the expired or aging internal battery in your Eaton 5P UPS system.

### Features

#### UPS Replacement Battery Cartridge for Select Eaton 5P UPS Systems

This UPS backup battery replacement is compatible with Eaton's 5P1500 and 5P1550G UPS systems. Eaton UPS batteries have an expected lifespan of three to five years, so you should take proactive steps to avoid a dead battery and ensure continuous uptime.

#### Comes Pre-Wired for Quick, Easy Installation

The sealed lead acid (SLA) 744-A2223 internal battery cartridge is hot-swappable, allowing you to install it without powering down any connected equipment. Built to function in a wide range of operating temperatures, the 744-A2223 has been carefully screened and certified to restore your UPS system's runtime performance to its original specifications. It is leakproof, requires no maintenance and comes pre-wired for quick and easy installation in your 5P UPS system.

### Highlights

- Replacement battery backup for Eaton 5P1500 and 5P1550G 5P UPS systems
- Carefully screened and certified to restore UPS runtime to original specs
- Leakproof internal battery cartridge requires no regular maintenance
- Ships pre-wired and ready for immediate installation to prevent downtime

### System Requirements

Compatible only with Eaton's 5P1500 and 5P1550G UPS systems

### Package Includes

744-A2223 Internal Replacement Battery Cartridge

## Specifications

| OVERVIEW                        |                                  |
|---------------------------------|----------------------------------|
| UPC Code                        | 037332282286                     |
| INPUT                           |                                  |
| Input Phase                     | Single-Phase                     |
| BATTERY                         |                                  |
| Battery Type                    | Valve Regulated Lead Acid (VRLA) |
| Battery Replacement Description | Re-use existing wiring harness   |
| Hot Swap Battery                | Yes                              |
| PHYSICAL                        |                                  |



Powering Business Worldwide

|                             |                           |
|-----------------------------|---------------------------|
| Unit Dimensions (hwd / in.) | 4.000 x 13.000 x 9.000    |
| Unit Weight (lbs.)          | 18                        |
| Unit Weight (kg)            | 8.16                      |
| ENVIRONMENTAL               |                           |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| APPLICATIONS                |                           |
| Used With                   | 5P1500, 5P1550G           |
| STANDARDS & COMPLIANCE      |                           |
| Product Certifications      | UL Listed; cUL Listed     |
| Product Compliance          | FCC (USA)                 |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.