THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		DIMENSIONS in. [mm]				
	AWG	[mm²]	L ± .02 [0.5]	W ± .02 [0.5]	H ± .02 [0.5]	C ± .02 [0.4]	D ± .01 [.3]
EQSP14D	#18-14	0.75-2.5	.76 [19.4]	.51 [13.0]	.30 [7.6]	.35 [8.8]	.03 [.7]

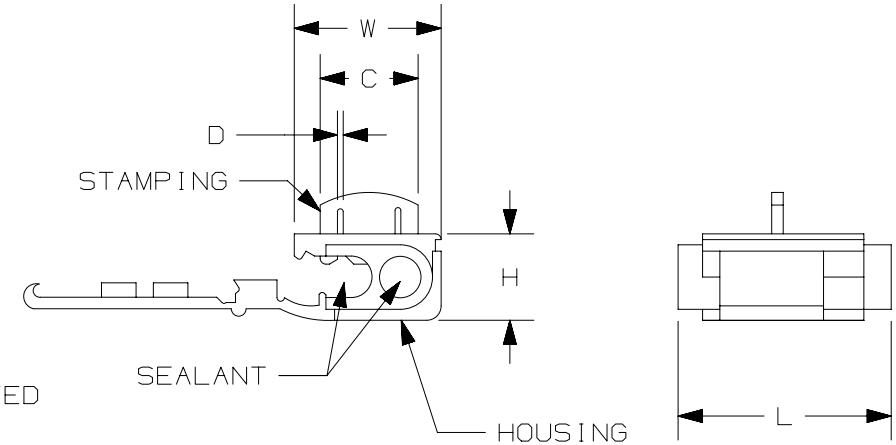

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. CONTAINS MOISTURE RESISTANT SEALANT
   C. 221°F [105°C] MAX. OPERATING TEMPERATURE
   D. 600 V. MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING: 0.31" [.8] THICK BRASS, TIN PLATED
   B. HOUSING: POLYPROPYLENE, BLUE
   C. SEALANT: SILICONE

3 SEE www.panduit.com FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

TITLE
STRONGHOLD QUICK SPLICE CONNECTOR
IDC WITH MOISTURE RESISTANT SEALANT #18-14 AWG
CUSTOMER DRAWING

ITEM REVISION NAME: 00123SSJ/00
DATASET FILE NAME: 00123SSJ/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 00123SSJ-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	-	-	N.T.S.	A

SHT 1 OF 1

D10100DA/15