


Tamper-Resistant Single Display Receptacles


Quick installation:
simply wire and
mount to a standard
single gang box

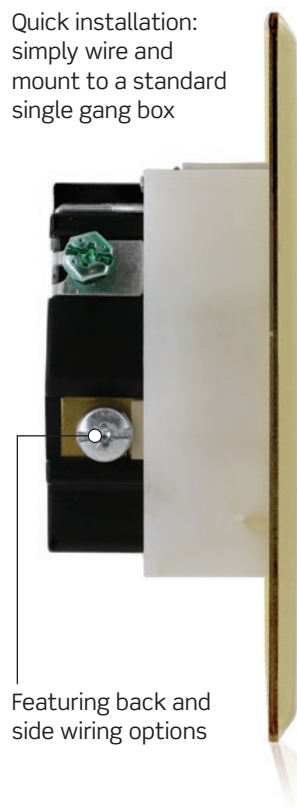

Featuring back and
side wiring options

Tamper-Resistant
receptacle meets
NEC Article 406.12
requirements


Heavy duty
specification grade
receptacle

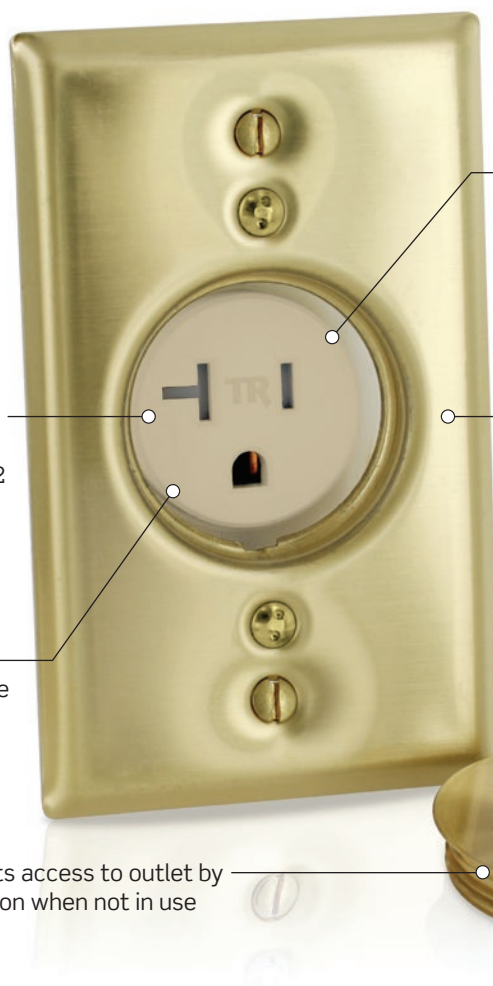

Single receptacle is
ideal for applications
that require a
dedicated circuit

Brass plate and
screw cap resist
abuse and
prevent foreign
contaminants from
entering device

Screw cap prevents access to outlet by
unauthorized person when not in use



Ordering Information

Description	15A	20A
Ivory Receptacle with Brass Plate & Screw Cap	T5250-B	T5350-B
Brass Replacement Cap	5249-CAP	

Common Applications


- Store Display Cases & Windows
- Hallways in Educational Facilities & Public Buildings

Specifications


Description	T5250-B	T5350-B
AC Horsepower Rating		
At Rated Voltage	1/2 HP	1HP
Electrical Specifications		
Amperage	15A	20A
Voltage	125V	125V
NEMA	5-15R	5-20R
Pole	2	2
Wire	3	3
Dielectric Voltage	Withstands 2000V per UL498	
Temperature Rise	Max 30 °C after 100 cycles at 150 percent rated current	
Environmental Specifications		
Flammability	Rated V-2 per UL 94	
Operating Temperature	-40 °C to +75 °C	
Material Specifications		
Receptacle Face	Nylon (Color: Ivory)	
Receptacle Body	Nylon	
Receptacle Line Contacts	Brass Triple-Wipe	
Receptacle Mounting Screws	Steel 10-32	
Receptacle Grounding Screw	Steel 8-32	
Receptacle Strap	Zinc-Plated Steel	
Wallplate	Brass; 0.061" thick	
Cap	Brass	
Mechanical Specifications		
Terminal ID	Brass-Hot, Green-Ground, Silver -Neutral	
Terminal Accom.	14-10 AWG	
Termination	Back and Side Wiring	
Standards & Certifications		
NEMA	WD-1 and WD-6	
ANSI	C-73	
Certification/Listing	cCSAus, NOM-ANCE	
Applicable Standards	UL 498, UL 514A, CSA C22.2, No. 42, CSA C22.2 No. 18.1-04	
Guarantees		
Product Warranty	10 Year Limited	

Dimensions


Front View

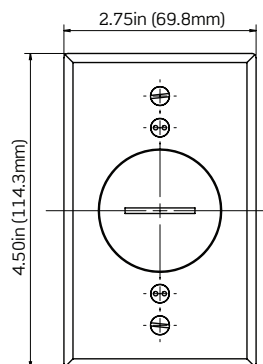



Back View

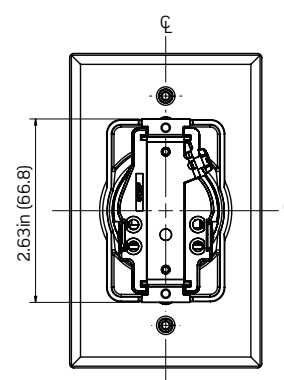

Top View



Side View

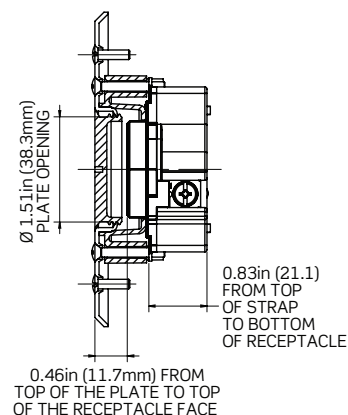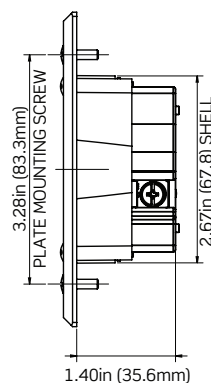

Visit our Website at:

www.leviton.com/industrial

email: industrial@leviton.com

Q-917

Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747

Telephone: 1-800-323-8920 • FAX: 1-800-832-9538

Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

© 2014 Leviton Manufacturing Co., Inc. All rights reserved.

121914

