


VIVOTEK Fixed Dome Series Wall-mount Bracket

Installation Guide

Using AM-21G wall-mount bracket
and compatible accessories

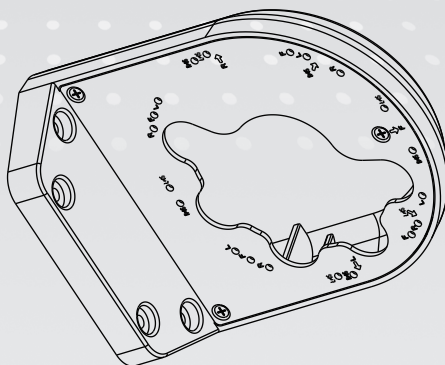

Corresponding part number:

AM-21G: 100200200G AM-21G_V01

QIG part no.: 625049500G


Rev. 1.0

Compatible VIVOTEK Cameras

Installation

For cabling and configuration details with each network camera, please refer to their documentation.


Refer to the table below for the description of the included screws:

Screw Description	Quantity	Applies to	
M4X25XD7 Phillips pan head	4	Securing the bracket to wall	
Plastic anchors	4	Securing the bracket to wall	


Wall Mount Installation

Below is a general, sample procedure using a wall mount bracket:


1. Locate the position where you want to install the wall mount bracket and camera. Drill holes on the wall for securing the bracket and for routing the cables.
2. Secure the bracket by hammering anchors into the wall and then fasten screws through the four mounting holes on the bracket.

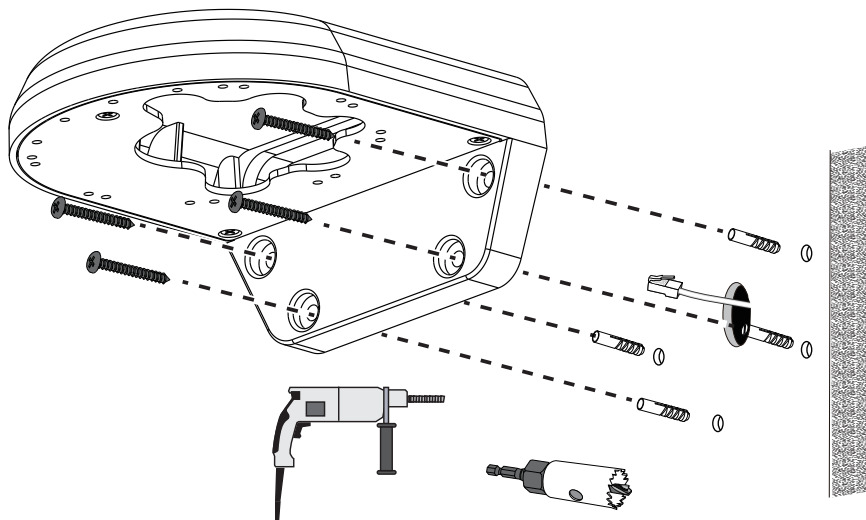

3. Route power lines and other cables through the wall and the bracket.
4. Turn the camera towards the field of view of your interest. Note that the orientation (camera lens) is separated by every 45° . The available shooting direction is illustrated below. When done, align the camera's screw slots with the corresponding mounting holes.
5. Secure the camera to the wall mount.
6. Install the dome cover using the included T10 driver in the camera's package.

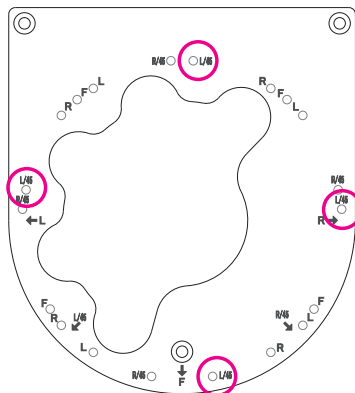

Usable holes
at this orientation

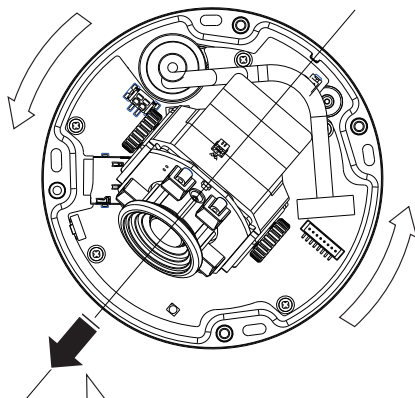

Shooting direction

