

## Call Point Replacement Faceplate Labels and Duty Plate Option

25500598 Rev A1 0224

**Limited Warranty:** This product's limited warranty can be found at [www.fedsig.com/SSG-Warranty](http://www.fedsig.com/SSG-Warranty).

**SAFETY MESSAGES TO INSTALLERS AND USERS** : It is important to follow all instructions shipped with this product. This Call Point station and its options are to be installed by a trained electrician who is thoroughly familiar with and will follow all applicable national and local codes in the country of use. This Call Point station should be considered a part of the warning system and not the entire warning system. The selection of the mounting location for the Call Point station and its controls, and the routing of the wiring are to be accomplished under the direction of the facilities engineer and the safety engineer. Listed below are some other important safety instructions and precautions you should follow:

- Read and understand all instructions before installing and operating this equipment.
- To avoid electrical shock hazards, do not connect wires when power is applied. Failure to observe this warning may lead to serious injury or death.
- Never alter the unit in any manner. Safety in hazardous locations may be endangered if additional openings or other alterations are made in units specifically designed for use in these locations.
- Do not connect this station to the system or modify it when the power is on.
- After installation, ensure that all threaded joints are properly tightened.
- Keep the unit tightly closed when in operation.
- After installation, test the station and the system to ensure that they are operating properly with the option installed.
- After testing is complete, provide copies of this instruction sheet to all personnel.
- Establish a procedure to routinely check the station and system for proper activation and operation.


Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death to you or others.

### Replacing the station's existing faceplate label

#### **WARNING**

The polyester (K71400935A-xx) and stainless steel (K71400976A-xx) faceplate labels are to be used only on non-EN54-11 Federal Signal Manual Call Point stations. The K71400701A is the **ONLY** faceplate label that may be applied to EN54-11 stations. Any other one of these labels being applied over or replacing the factory installed EN54-11 flaming building label will void its certification.


The polyester (K71400935A-xx) and stainless steel (K71400976A-xx) faceplate labels within this kit are provided as a service/accessory part for existing Federal Signal Call Point stations in need of a replacement faceplate label. The polyester labels have either white or black text over a clear background with "FIRE," "EVAC," "GAS ALARM," "BIOHAZARD ALARM," "LOCKDOWN," "EMERGENCY," "SHUTDOWN," or an Evac logo, all provided on one sheet for multiple applications. The stainless steel labels have black text with "FIRE," "EVAC," "GAS ALARM," or "BIOHAZARD ALARM" provided as individual labels. Remove the existing label and be certain that the application area is free from any dirt, residue from the previous label, smudges, or oil prior to application. Residue removal cleaners must be applied locally to the area of the new label's application. All labels have a peel-off paper liner exposing a pressure-sensitive adhesive backing. Initial placement is critical, as the adhesive is aggressive once it touches the station's faceplate-designated label area.

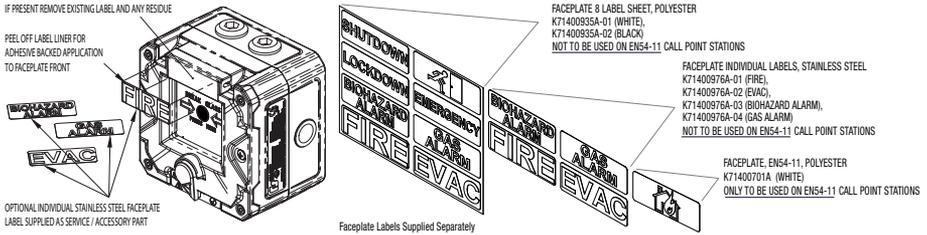

## Installing the stainless steel Duty Plate field option on BG (Break Glass) Stations

**NOTE:** The stainless steel Duty Plate kit (K859902480A-xx) cannot be used with Model CP- BG (break glass) stations that have the Hammer Bar option already installed.

These stainless steel duty plates are supplied as a custom special order field service/accessory kit, with the end user previously providing the desired text for their specific application on Federal Signal Manual Call Points break glass stations. Consult the factory for the lead time regarding the fabrication of custom duty plates along with minimum order quantity requirements. Alignment must be made so that the two duty plate holes match those on the side of the rear housing (ref. illustration). Two screws are provided so that the plate is securely held in place during the station's life usage.

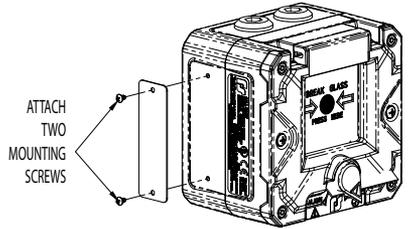

## Maintenance and Service

**Technical Assistance:** Contact our Technical Support Team at +1 708-587-3587 or [signalsupport@fedsig.com](mailto:signalsupport@fedsig.com).

**Repair Service:** A return authorization is required. Contact your Authorized Distributor or Federal Signal Customer Support. Defective products under warranty will be repaired or replaced at Federal Signal's discretion.

**Product Returns:** Returns require authorization from Federal Signal. Contact your Authorized Distributor for more information on our return policy or to request a return.



2645 Federal Signal Drive, University Park, Illinois 60484

Additional translations available at [signaling.fedsig.com](http://signaling.fedsig.com)

Traducciones adicionales disponibles en [signaling.fedsig.com](http://signaling.fedsig.com)

Customer Support 1-800-344-4634+1-708-534-4756, [iordersup@fedsig.com](mailto:iordersup@fedsig.com)

Technical Support 1-800-755-7621+1-708-587-3587, [signalsupport@fedsig.com](mailto:signalsupport@fedsig.com)

[signaling.fedsig.com](http://signaling.fedsig.com)