


# BOX DOUBLE SWING WALL MOUNT

NEMA 4 RATED WALL MOUNT FOR OUTDOOR USE

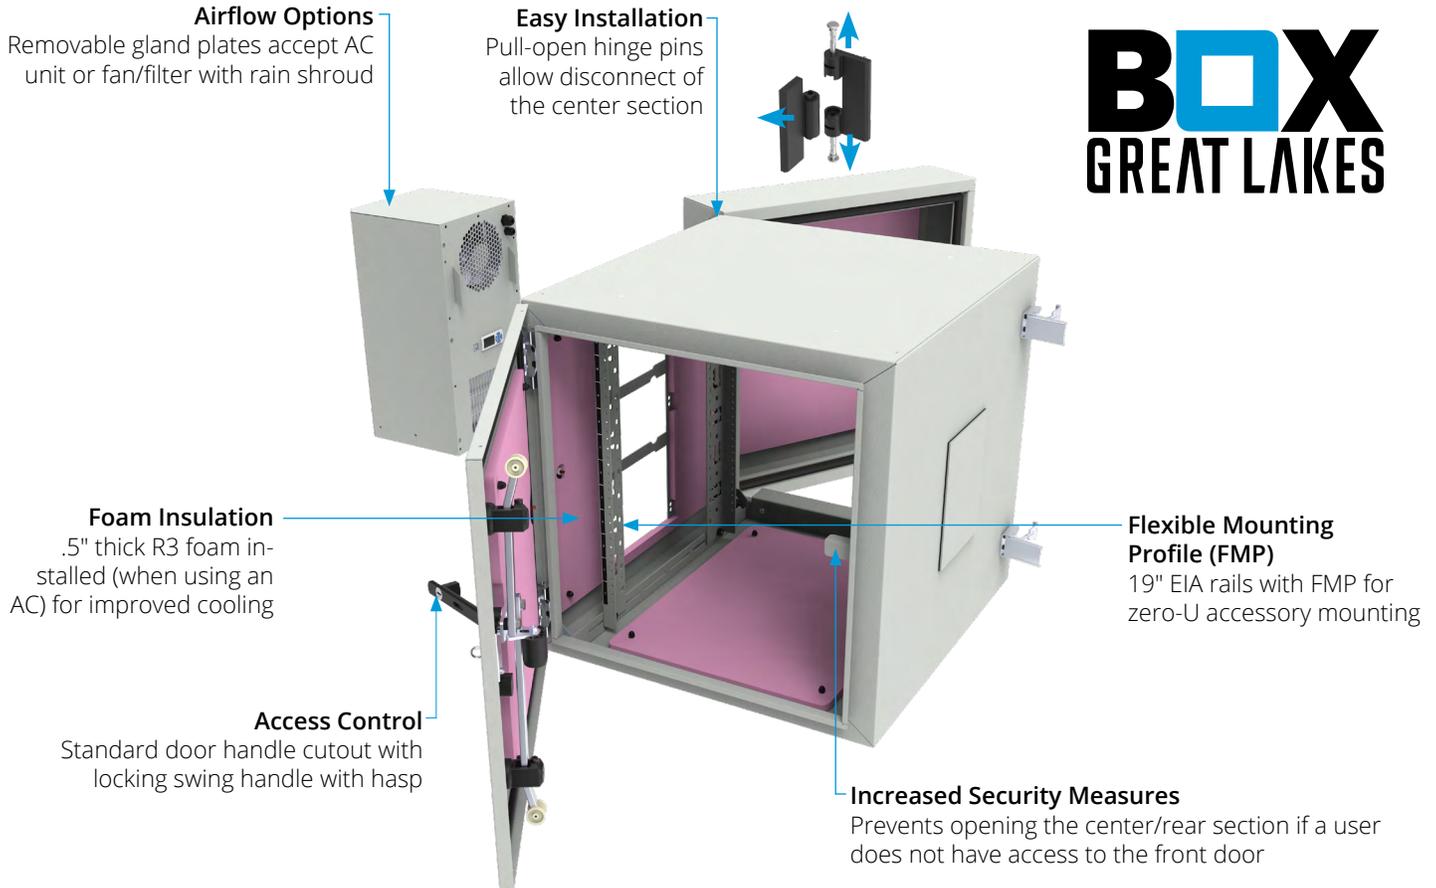

Using the attribute chart below, select a Base Unit and Airflow unit to designate a standard BOX Double Swing Wall Mount

Base Unit	Airflow	Example
BXWM04-xxUxx-GY-SH-	xxxxx	Configured BOX Double Swing
<b>BXWM04-11U26-GY-SH-</b> (11U, 26"D)	<b>00000</b> (none)	<b>BXWM04-11U32-GY-SH-AC010</b>
<b>BXWM04-11U32-GY-SH-</b> (11U, 32"D)	<b>FFKN4</b> (Fan/Filter Kit: 28 CFM, 115V fan w/ 6', 5-15P cord; includes exhaust filter and two rain shrouds (RAL 7035 Gray) <sup>1</sup>	<b>BOX Double Swing Wall Mount,</b>
<b>BXWM04-18U32-GY-SH-</b> (18U, 32"D)	<b>AC010</b> (1000 BTU AC; 115V; 300W; SNMP Level 3; 6', 5-15P cord) <sup>2</sup>	<b>(11U, 32"D, Gray, Swing Handle,</b>
<b>BXWM04-25U32-GY-SH-</b> (25U, 32"D)	<b>AC020</b> (2000 BTU AC; 115V; 600W; SNMP Level 3; 6', 5-15P cord) <sup>2</sup>	<b>1000 BTU AC)</b>
	<b>AC041</b> (4100 BTU AC; 115V; 1200W; SNMP Level 3; 6', 5-15P cord) <sup>3</sup>	

<sup>1</sup>One fan/filter kit included; 36" and 48" wall mounts can accept an additional kit (purchased separately); <sup>2</sup>1000 and 2000 BTU AC for use with 24" and 36"H; <sup>3</sup>4100 BTU AC for use with 48"H

## FEATURES

- Two pairs of depth adjustable #12-24 mounting rails, 19" EIA
- Rails feature square hole pattern for ¼ turn "D" rings and "T" slots for cinch straps
- Front door with 150mm x 25mm standard door handle cutout
- 90-degree security hinge with pull-open hinge pins allow removal of the center section for easy installation of rear section only
- Removable gland plates accept optional AC unit or fan/filter kit with rain shrouds
- Reversible mounting for left- or right-hand opening (Note: AC will always install on hinge side)
- RAL 7035 Gray, with UV-rated textured powder coat
- Standards: NEMA 250 Type 4, Country of Origin, USA



4193 Route 6N • Edinboro, PA 16412 | 1.866.879.4522

View the complete Great Lakes product line at [GreatCabinets.com](http://GreatCabinets.com)

©2024 Great Lakes Data Racks & Cabinets. All rights reserved.