
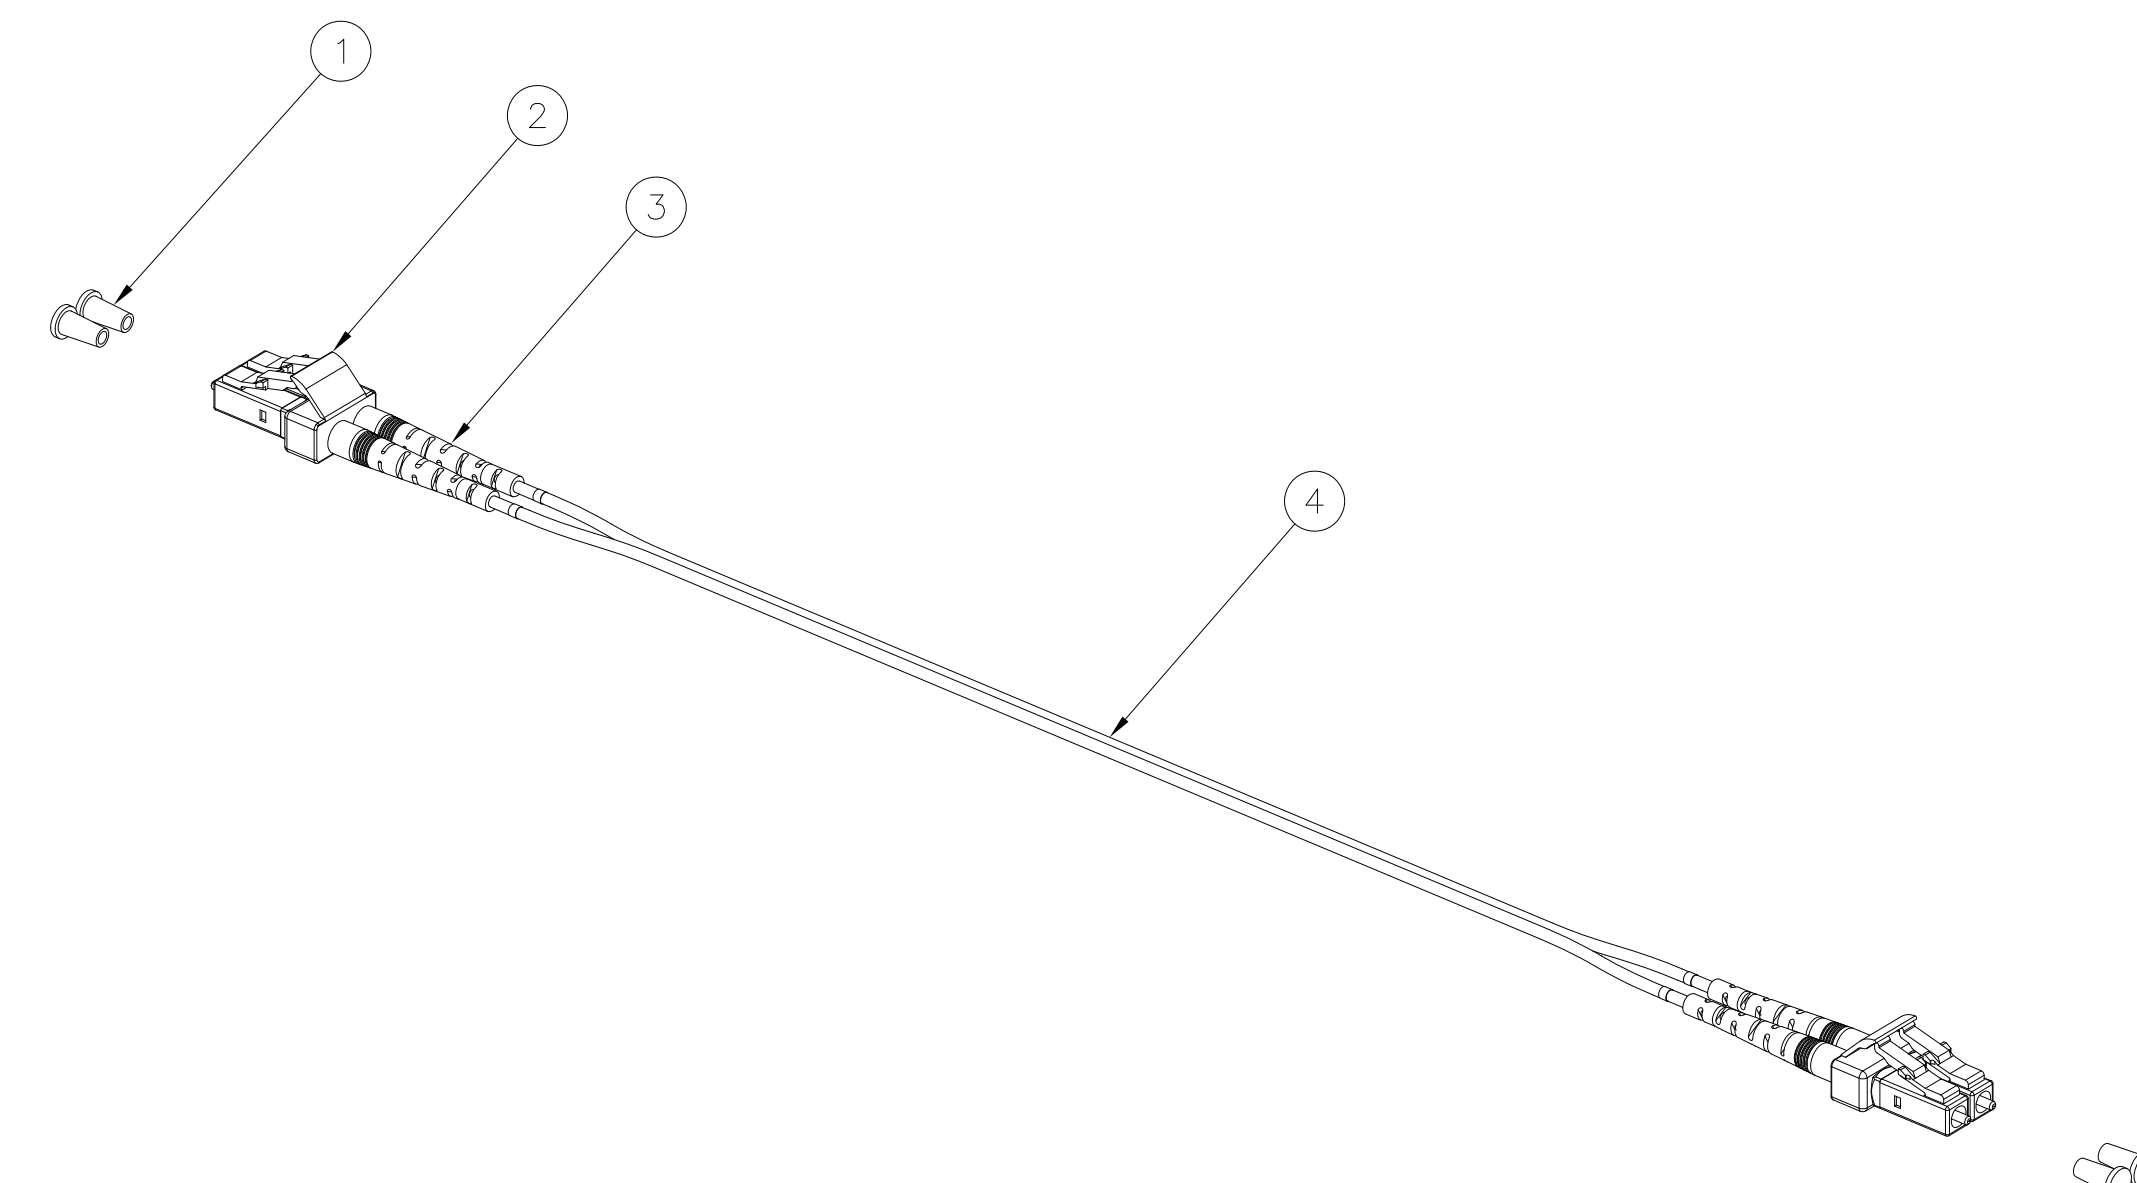


ITEM NO.	DESCRIPTION	QTY.
1	LC/LCA CONNECTOR DUST CAP	4
2	LC/LCA DUPLEX CONNECTOR BODY	2
3	2.0mm LC/LCA CONNECTOR BOOT	4
4	2.0mm DUPLEX CABLE	A/R


CATALOG NO.	FIBER TYPE	CABLE COLOR	POLISH	CONNECTOR COLOR	BOOT COLOR
FDLCxxSM	OS2	YELLOW	UPC	BLUE	BLUE
FDLCxxMM	OM4	AQUA	UPC	BEIGE	WHITE

XX = LENGTH IN METERS

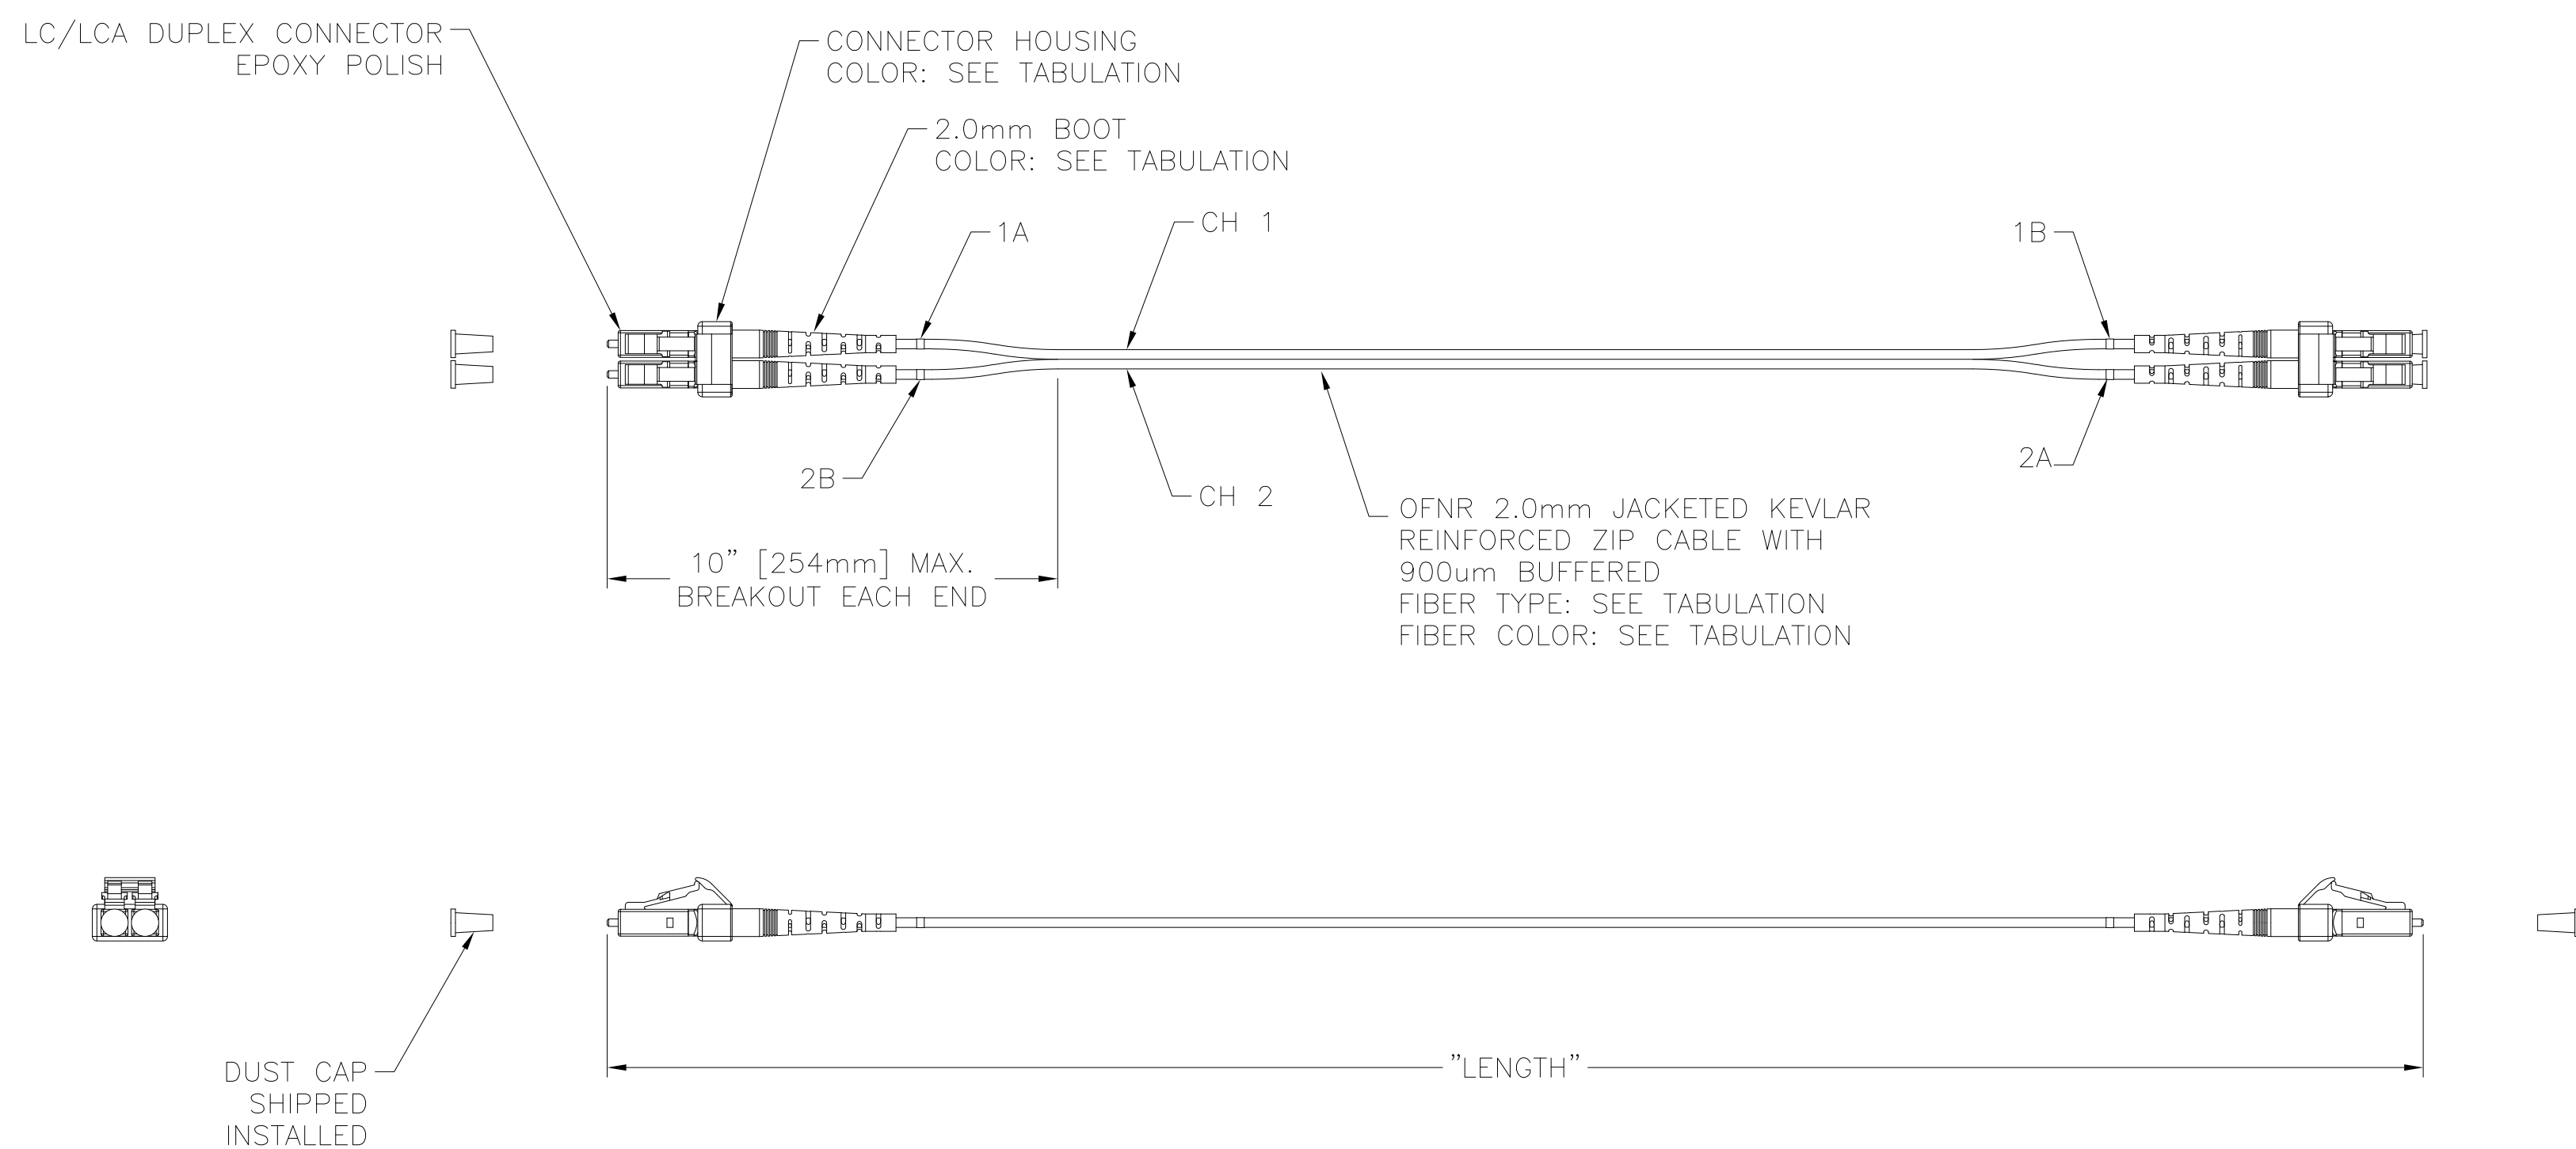

NOTES:

- CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-D.3 SPECIFICATIONS.
- CONNECTOR USES A UPC/APC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN.
- OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

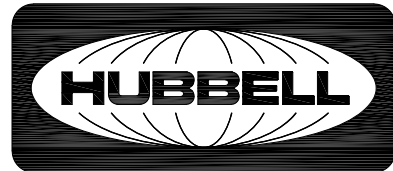Created on AUTOCAD	DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES .XX = ±.01 (.25) .XXX = ±.005 (.127) .XXXX = ±.0025 (.0635) ANGLE TO ±1°	PROJECT REFERENCE:	 <b>Hubbell Premise Wiring</b> HUBBELL INCORPORATED (Delaware) 23 CLARA DRIVE, SUITE 103 MYSTIC, CT 06355
	IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION	MATERIAL:	
		DRAWN BY: A.KARANXHA	SIZE: DRAWING NO. <b>D HWS15289C</b>
		CHECKED BY:	REV. <b>1</b>
		APPROVED BY:	SCALE: <b>NTS</b> SHEET <b>1</b> OF <b>1</b>

1	240315037747	INITIAL RELEASE	AK	MMA
REV.	ECN	DATE	CHG BY	APPD BY