

Model No.

# LUH-VRG

Vandal-Resistant Grille for Lowell Unihorn™



## INCLUDES:

- Cast aluminum grille with stainless steel barrier screen
- 8-32 stainless steel spanner screws
- 8-32 stainless steel nuts

---

CAST ALUMINUM GRILLE, designed to protect Lowell's Unihorn™ from damage in areas where vandalism may be a concern, can be mounted indoors or outdoors. It's typical for schools, correctional facilities, transportation terminals, manufacturing sites, hospitals, distribution centers, and similar locales. The grille allows clear sound projection while protecting mounted components.

---

## FEATURES

- Construction is rugged cast-aluminum with a secondary stainless steel barrier screen to prevent pointed objects from causing damage to mounted components
- 8.02" diameter x 0.78"D
- Network Grey powder epoxy finish
- Four (4) tamper-resistant, stainless steel 8-32 spanner screws, which can be used to mount the grille directly to the 9.6" diameter trim ring that's included with some Unihorn models.
- Four (4) 8-32 stainless steel nuts, which are used to mount the grille to a Unihorn when used without a trim ring.

## COMPATIBILITY:


The grille is compatible with:

- Horn Models: LUH-15TA, LUH-15TX
- Backbox Models: LUH-BOX
- Trim Plate Model: LUH-TP

## A&E SPECIFICATIONS:

The vandal-resistant grille shall be Lowell model LUH-VRG, which shall be heavy-duty cast aluminum construction with a stainless steel barrier screen to protect the horn from damage. The round grille shall have an 8.02 in. diameter with mounting projection of 0.78 in. It shall include stainless steel 8-32 spanner screws to mount to the trim ring (included with some models of Lowell's Unihorn™), and 8-32 stainless steel nuts to mount directly to the Unihorn when a trim ring is not used. The grille shall have a Network Grey powder epoxy finish.

TYPICAL INSTALLATION:

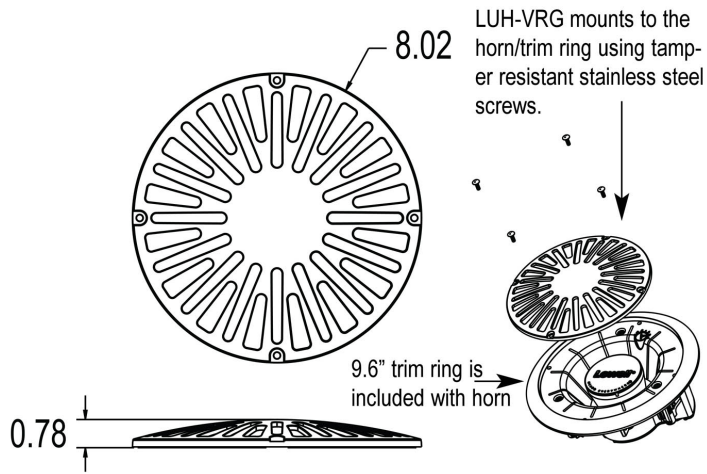

RECESSED: Model LUH-VRG grille mounted to the Unihorn in a recessed application, with the horn's trim ring in place.



SURFACE-MOUNT: Model LUH-VRG grille mounted to the Unihorn in a surface-mount application using U-bracket Model LUH-BRKT (horn's trim ring is not used).