


ACERBOX

BY SPACE AGE ELECTRONICS



FEATURES

- Custom sizes, colors, and lettering available
- 16 gauge steel construction
- Liftaway hinge with a CAT 30 keyed door lock
- EMT and rigid 0.5", 0.75", 1" and 1.5" cluster knockouts
- Removable, 0.5" raised 18 gauge galvanized back plate with mounting hole matrix
- Internal threaded grounding lug screw in back box
- Grounding stud screw on cover

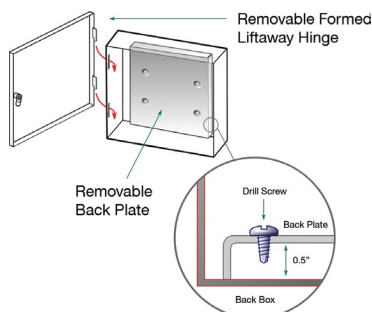

ACE

Accessory Cabinet Enclosures

Economical enclosures ideally suited for field troubleshooting and easy maintenance of system wiring, these surface mountable cabinets are available in a variety of sizes to meet your demands and satisfy NEC 760.30.

Every durable box is fabricated from 16 gauge steel with a powder coat finish and features a formed liftaway hinged door CAT 30 key locked for security. Standard units are available in red, but can be easily customized to any color or size with the additional option of screened labelling on the door. Also included is an interior galvanized back plate with a hole matrix configuration raised 0.5" to provide ample room for mounting optional components.

SPECIFICATIONS

Constructed of 16 gauge (.059" thick) cold rolled steel and finished with a durable, heat-resistant baked-on enamel. Front cover features a removable formed liftaway hinge and a high security CAT 30 keyed door lock. Custom sizes, finishes, and labeling available. EMT and rigid 0.5", 0.75", 1" and 1.5" knockout clusters embedded in cabinet. 18 gauge galvanized removable back plate is mounted on studs to the back box. Plate clears the back box by 0.5" to accommodate mounted hardware. Custom equipment mounting can be accomplished with standard hole matrix or self tapping drill screws. Cover and back box include a threaded grounding stud and lug.

CUSTOM BRANDING AVAILABLE





AGENCY APPROVALS

UOXX.S2580 UL Listed Control Unit Accessories

ORDERING INFORMATION

| P/N# | Size | Box Width | Box Height | Box Depth | Mount Pattern Width | Color | Custom Branding |
|-----------|------|-----------|------------|-----------|---------------------|-------|-----------------|
| SSU00760 | 5 | 10.24" | 10.62" | 3.43" | 8.5" | Red | No |
| SSU00760C | 5 | 10.24" | 10.62" | 3.43" | 8.5" | Red | Yes |
| SSU01760 | 5 | 10.24" | 10.62" | 3.43" | 8.5" | Black | No |
| SSU01760C | 5 | 10.24" | 10.62" | 3.43" | 8.5" | Black | Yes |
| SSU00656 | 2 | 14" | 14" | 3.25" | 11.5" | Red | No |
| SSU00656C | 2 | 14" | 14" | 3.25" | 11.5" | Red | Yes |
| SSU01656 | 2 | 14" | 14" | 3.25" | 11.5" | Black | No |
| SSU01656C | 2 | 14" | 14" | 3.25" | 11.5" | Black | Yes |
| SSU00647 | 3 | 18.25" | 18.25" | 5.5" | 16" | Red | No |
| SSU00647C | 3 | 18.25" | 18.25" | 5.5" | 16" | Red | Yes |
| SSU00655 | A | 23.5" | 13" | 5.5" | 20.25" | Red | No |
| SSU00655C | A | 23.5" | 13" | 5.5" | 20.25" | Red | Yes |
| SSU01655 | A | 23.5" | 13" | 5.5" | 20.25" | Black | No |
| SSU01655C | A | 23.5" | 13" | 5.5" | 20.25" | Black | Yes |
| SSU00657 | D | 23.5" | 23.5" | 5.5" | 20.25" | Red | No |
| SSU00657C | D | 23.5" | 23.5" | 5.5" | 20.25" | Red | Yes |
| SSU01657 | D | 23.5" | 23.5" | 5.5" | 20.25" | Black | No |
| SSU00658 | F | 23.75" | 30.75" | 5.5" | 20.25" | Red | No |
| SSU00658C | F | 23.75" | 30.75" | 5.5" | 20.25" | Red | Yes |
| SSU01658 | F | 23.75" | 30.75" | 5.5" | 20.25" | Black | No |
| SSU01658C | F | 23.75" | 30.75" | 5.5" | 20.25" | Black | Yes |
| SSU00669 | J | 24" | 46" | 6.5" | 21" | Red | No |
| SSU00669C | J | 24" | 46" | 6.5" | 21" | Red | Yes |
| SSU01669 | J | 24" | 46" | 6.5" | 21" | Black | No |
| SSU01669C | J | 24" | 46" | 6.5" | 21" | Black | Yes |