

TURING SOLARSHIELD ONE

All-In-One Outdoor Solar Video Surveillance

LS-KG2-ONEM-3Y

KEY FEATURES

- ✓ Easy and rapid deployment
- ✓ Smart Security, powered by Turing Vision Cloud
- ✓ Fully equipped with varifocal zoom cloud cameras
- ✓ Built-in 4G/LTE router with remote network management
- ✓ Remote monitoring: battery status, remote reboot, and more
- ✓ Dual 26AH batteries & dual 90W solar panels for extended uptime




SIM Carriers



T Mobile

verizon

FIRSTNET.
Built with AT&T

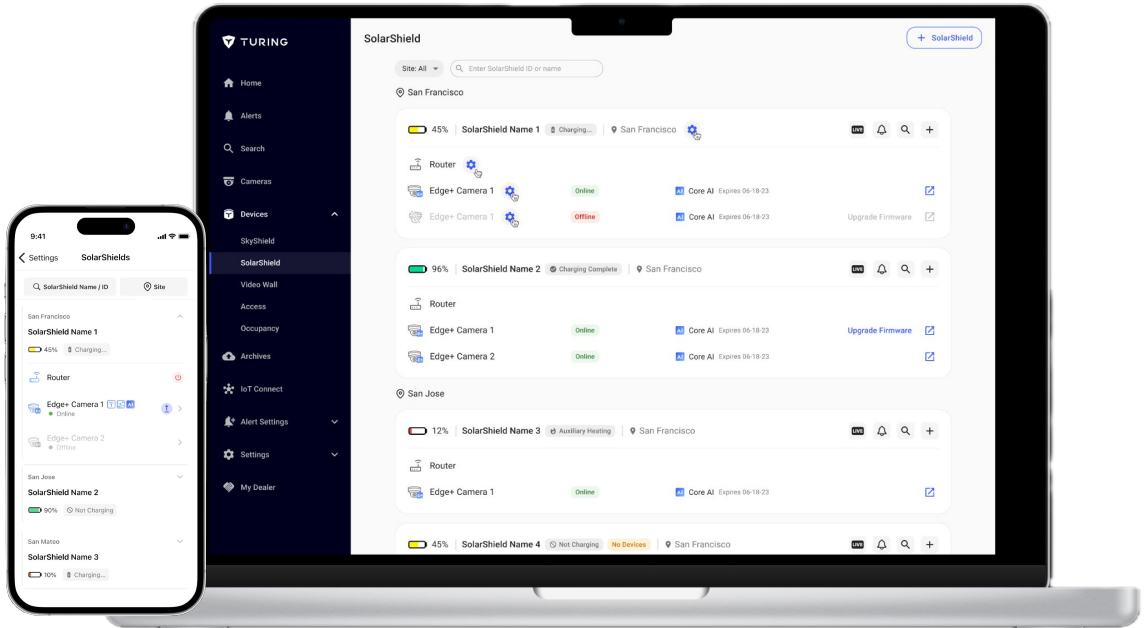

KEY FEATURES

- ✔ Remote Power management including battery reboot and router reboot
- ✔ Remote status monitoring including charging status, battery status and router status
- ✔ Support Time Lapse video creation on the cloud
- ✔ Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications
- ✔ Remote Live Stream Monitoring
- ✔ Share Live Camera Streams With First Responders
- ✔ Find Events Fast with Smart Video Search and Archive/Share for Future Reference
- ✔ View Live Footage From any Desktop / Mobile Device
- ✔ Flexible Hybrid Storage Locally or on the Cloud

GENERAL	
Dimensions (LxWxH)	MINI Waterproof Case: LS-KG2-ONEN-01: 13.0" x 8.7" x 17.7" Single Solar Photovoltaic Racking: TA-S90W: 12.8" x 5.9" x 13.8"
Weight	MINI Waterproof Case: 19.8lbs Single Solar Photovoltaic Racking: 8.8lbs
Working Environment	Outdoor: -30°C~+ 60°C (-22°F~+140°F)
Rating	IP65

POWER	
Standard Output Power	TA-S90W x2 : 90W/18V Power/Voltage: 90W/18V
Power Interface	Integrated Bracket & Smart Controller, Solar Module and Smart Battery

BATTERY	
Battery Type	Lithium
Capacity	26Ah x 2
Working Voltage	9~12.6V
Working Current	10A Max
Operating Temperatures	-30°C to 60°C (-22 F to 140°F)

Heat	
Heat	Smart battery module, supports intelligent auxiliary heating, adapts to extreme cold weather

CAMERA (EVD5ZB256)	
Sensor	1/2.8" 5MP 16:9 Progressive Scan CMOS
Lens	2.7-13.5mm zoom lens; F1.6~F3.1
Field of View	H: 106~32°; V: 55~18°; D: 129~37°
Manual Angle Adjustment	Tilt: 0°~90°; Rotate: 0°~180°
Electronic Shutter	1/32000 - 1/5 sec
Minimum Illumination	0.005 LUX @ F1.6
Day / Night	MIRC Filter
IR Range	IR LED: Up to 98 ft (30m)
IR Wavelength	850nm
Wide Dynamic Range	120 dB wide dynamic range (WDR); 2D & 3D digital noise reduction

NETWORK(Cellular)	
Standard and Band	LTE FDD: B1/B3/B5/B7/B8/B20/B28 B1/B2/B3/B4/B5/B7/B8/B28 (Optional), B2/B4/B5/B12/B13/B17/B66/B71 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100/1900/900/850MHz EV-DO: BC0 CDMA 1x: BC0 EDGE/GPRS/GSM 850/900/1800/1900MHz
Antenna Interface	Cellular: 2 * Standard SMA female antenna interface, characteristic impedance: 50 Ω
SIM/UIM Slot	Standard drawer-type user card interface

LOCAL VIDEO STORAGE	
Onboard Storage	256GB, up to 30 days* <small>*Actual retention period may vary based on scene complexity and activity</small>

VIDEO & AUDIO	
Video Compression	H.265/H.264 w/ smart encoding; MJPEG;
Resolution & Frame Rate	Main Stream: 2880*1620 up to 30 FPS Sub Stream: 1280*720 up to 30 FPS
Image Flip & Rotation	Normal / Vertical / Horizontal / 180° / 90° Clockwise / 90° Counterclockwise
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/ Locked/Auto2
Audio	Microphone, Line In/Line Out; G.711/G.726

Mount Options / Typical Application

LS-KG3-ONE-3Y


MOUNT OPTIONS Pole Mount

3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



MOUNT OPTIONS Wall Mount

M8 x 80
(Not included in Product)



Typical Application

Turing products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION

Level	Description
Top-level protection	Turing products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more
Moderate protection	Turing products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 1 mile away from coastlines, as well as areas affected by acid rain.
No specific protection	Turing products at this level are equipped for use in areas where no specific anti-corrosion protection is needed